



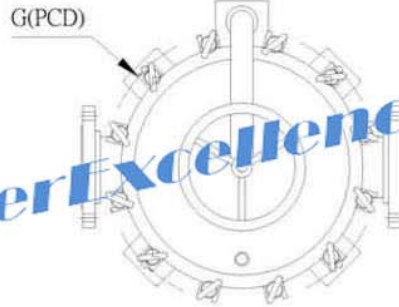

濾心式過濾器法蘭口 150LB/10K

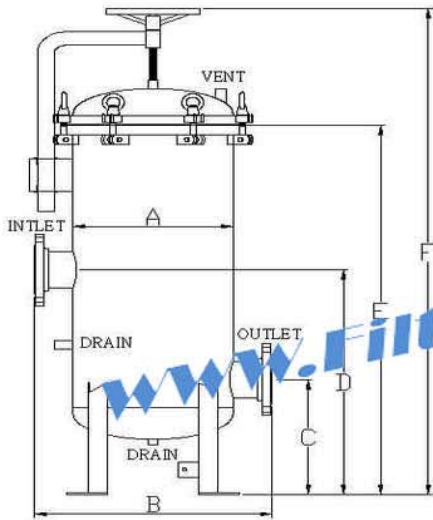

本體材質	墊片	濾心規格	設計壓力 Kg/cm ² G	最高溫度 °C	表面處理	選購配件	客製化
SUS304	EPDM	30"	10	100	電解 酸洗	濾心 中間隔板	
SUS316	VITON	40"	10	100			
SUS316L	PTFE		10	100			

尺寸單位: mm

型號 Model	濾心 長度	適用尺寸	排水 尺寸	A (φ mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G(PCD) (φ mm)	流量 m ³ /h
CF8~12	30"	2"- 3"	1"-FPT	300	500	350	700	1320	1690	410	10- 40
	40"							1570	1940		
CF13~20	30"	3"- 4"	1"-FPT	406	606	350	700	1320	1700	516	40- 60
	40"							1570	1950		
CF37~46	30"	6"	1"-FPT	600	800	400	800	1380	1790	744	60- 120
	40"							1630	2050		
CF57~81	30"	8"	1-1/2"FPT	762	962	500	950	1480	2130	960	120- 250
	40"							1730	2380		
CF82~95	30"	8"	2"FPT	900	1100	550	1000	1630	2330	1100	120- 250
	40"							1880	2580		
CF96~135	30"	10"	2"FPT	1000	1200	600	1100	1710	2420	1200	250-400
	40"							1960	2670		
CF136~155	30"	10"- 12"	2"FPT	1100	1300	650	1250	1760	2475	1300	400-550
	40"							2010	2725		
CF156~173	30"	12"- 14"	2"FPT	1200	1400	650	1250	1760	2480	1400	550-700
	40"							2010	2730		

濾傑提供專業的過濾設備，傑出的過濾表現，提升製程流體的品質，降低昂貴濾材的更換頻率，兼顧防治污染與環保維護，保護重要設備。